


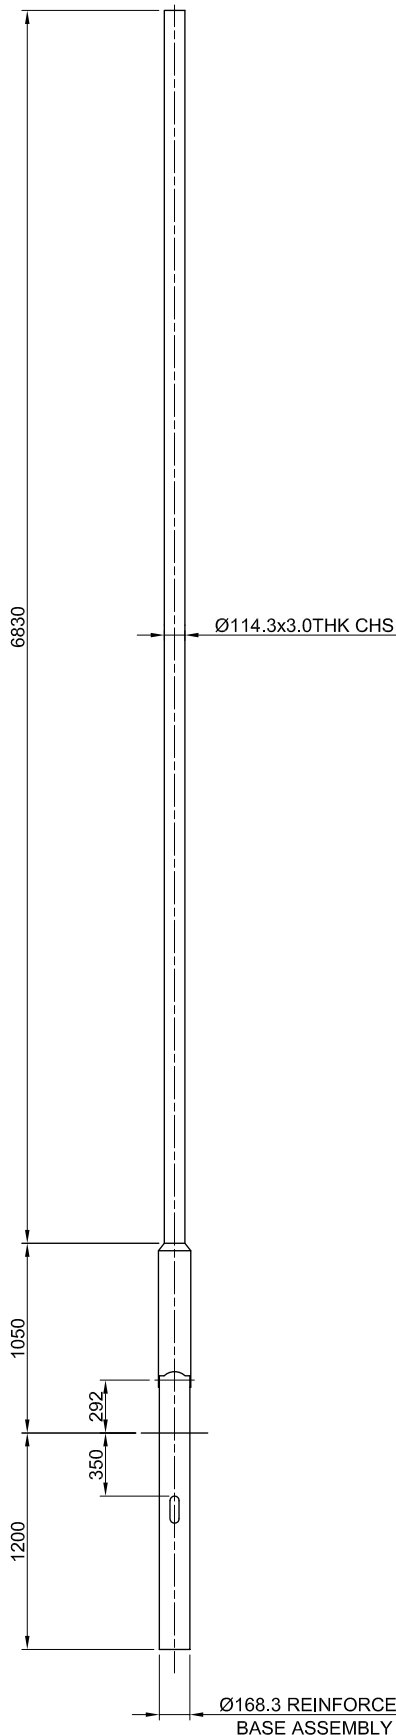

MATERIAL	LENGTH	QTY
Ø114.3X3.0THK CHS	6895	1

ITEM No: T088RLH
WEIGHT: 106 KG

REV:	SIG:	DESCRIPTION	DATE	CHD.
B	M.M.	SEE AMD. No. 2260.	08.01.98	
A	M.M.	SEE AMD. No. 2163.	15.07.97	A.B.

Copyright Strictly Reserved Abacus Municipal Ltd. © 1996	GENERAL TOLERANCES UNLESS STATED OTHERWISE: - 0-500mm----- ±5 501mm-1000mm--- ±10 ABOVE----- ±20	DRAWN M. MORRIS.	TITLE GENERAL ARRANGE,MENT OF T088RLH	<div>Abacus® SUTTON-IN-ASHFIELD, NOTTS</div>
		CHECKED S. WRAY.		
		SCALE 1:30		
PATENT No. REG. DESIGN No.	968113	DATE 17.07.96	SALES ORDER No.	CLIENT STANDARD COMPONENT T088RLH B

NOTES

- FIRST ANGLE PROJECTION.
- DIMENSIONS SHOWN IN BRACKETS THUS (25) ARE REF. DIMENSIONS ONLY.
- REMOVE ALL BURRS AND SHARP EDGES.
- DO NOT SCALE IF IN DOUBT ASK.
- WELDING SYMBOLS ARE TO BS EN 24063 & BS EN 22553.
- ALL STANDARDS AND SPECIFICATIONS ARE TO BE TO THE LATEST REVISIONS.
- FILLET WELDS TO BE TO WELD PROCEDURE No. 031W.
- MATERIAL: CHS TO BS EN 10210 S355 WITH A TENSILE STRENGTH OF 490N/mm.sq. PLATE TO BS EN 10025 S275.
- CABLE ENTRY SLOT MEASURES 150 x 50.
- 10.BASE COMPARTMENT
168 R/L BASE ASSEMBLY:- FITTED WITH A 11 mm THK CREOSOTED TIMBER BASEBOARD MEASURING 620 x 84. DOOR OPENING MEASURES 570 x 130 AND IS COVERED BY THE LID OF THE COLUMN.
- FOR DETAIL OF 168 R/L BASE ASSEMBLY REFER TO DRG NO. RL201/10/GA
- FINISH: HOT DIP GALVANISED TO BS EN ISO 1461.